



Future Industrial Co.,Ltd

Factory add.: 6th floor, A1 building, Yijing industrial park, Tianliao estate, Gongming town, Bao'an District,
TEL:+86-755- 2716 9174 FAX:+86-755-2716 2505
Web.:www.future-lighting.com

产品特点 FEATURES


1. 一体化设计，安装简便，各组件均可方便更换，节省成本。
1.Integrated design, convenient installation, Components are easy to change, cost savings. Small volume, easy to transport.
2. 智能控制器匹配PIR运动红外线感应器，保证灯具的有效照明能力。
2.PIR motion infra-red sensors and intelligent controller,to ensure the effect of the lamps and lanterns lightingability.
3. 专业防水设计，防护等级IP66。
3.Professional heat dissipation design; Professionalwaterproof design, protection grade Ip66.
4. 支持多种灯臂，适用不同纬度地域及不同形式灯杆安装要求。
4.USES of rotating lamp arm to multi-angle adjustment,it is suitable for different latitude regions and different forms of light pole installation requirements.

产品外观 PRODUCT APPEARANCE

不包含灯杆，产品外观以实物为准。



规格尺寸 DIMENSIONS

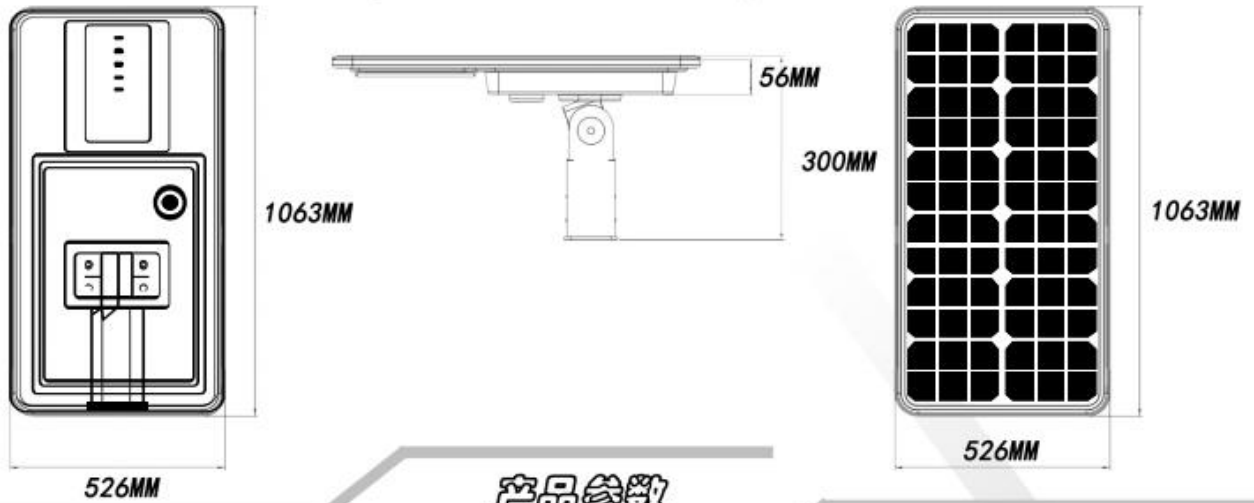

产品参数 Parameters

| | |
|-----------------------------------|--|
| 产品型号 Model | OS-C-60W |
| 太阳能电池板 monocrystalline silicon | 80W/18V 单晶硅板 80W/18V monocrystalline silicon |
| 电池 Battery | 磷酸铁锂电池 32AH /12.8V Lithium-ion Li FePO4 batteries 32AH /12.8V |
| 功率 | 60W |
| 灯珠色温 CCT | 5700K-6000K |
| 放电时间 Operating time | 满足每天7~8小时有效光照充电, 可达到全功率≥12小时 / 智能模式 4~5天, Full power ≥12 hours, Intelligent mode 4-5 days |
| 整灯光效 Lighting eff. lm/w | ≥160LM/W |
| 光能转化率 conversion rate | ≥20% |
| 工作温度 Operating temperature | -10° C ~ 60° C |
| 安装高度 Installation height | 4M-6M |
| 质保时间 Warranty | 3年 3 years |
| 防护等级 Waterproof rate | IP65 |